




减少声桥可以提高隔声量



39dB




42dB




46dB

Refer to Application Sheet Number 3.805 - "Construction Methods to Maximize Acoustic Performance".

轻重墙复合，弹性吊顶，可以提高隔声量

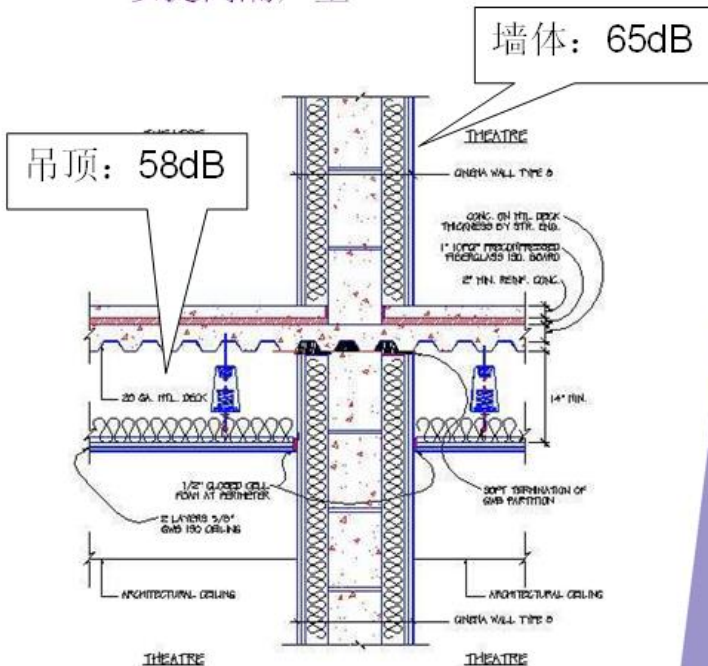

隔声吊顶
 $R_w=55dB$

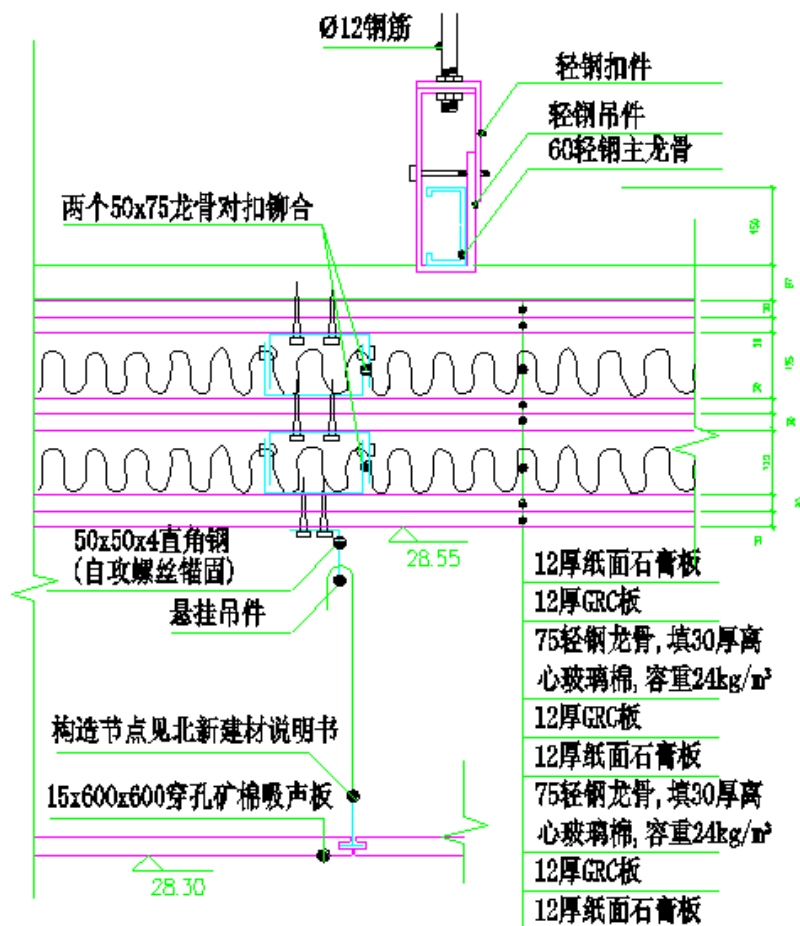

注：吊点密度为550x575